

STYLUS REACH® / STYLUS REACH® 18 ALKALINE BATTERY-POWERED PEN LIGHT

MARKET

APPLICATIONS: Law Enforcement, Security, Hardware/Tool, Sporting Goods, Fire & Rescue, Industrial Safety, Occupational Safety, Automotive, Gift, Consumer

DESCRIPTION: Ultra-slim pen light featuring a flexible cable extension with a high intensity LED end. Perfect for illuminating hard-to-reach or tight spaces.

CASE MATERIAL: Machined aluminum case with non-slip knurled grip. Reach® available in black or silver anodized finish. Reach® 18 available in black anodized finish.

DIMENSIONS: Reach® Length: 14 in. (36 cm) extended and 7 in. (18 cm) folded Diameter: 0.375 in. (0.95 cm)
Reach® 18 Length: 25 in. (64 cm) extended and 13 in. (33 cm) folded


WEIGHT: Reach®: 1.7 oz (48 grams) with batteries (included with purchase)
Reach® 18: 2.5 oz (70 grams) with batteries (included with purchase)

LIGHT SOURCE: High intensity white 5mm LED, impervious to shock with a 100,000 hour lifetime.






LIGHT OUTPUT: 140 candela peak beam intensity, 24m beam distance and 11 lumens measured system output.



ON/OFF: Features momentary blink or constant “on” operation.


RUN TIME:  24 continuous hours to the 10% lumen output level.


BATTERY: 3 “AAAA” size alkaline batteries.

FEATURES:
 High intensity white LED.
 Individually serialized for positive identification.
 IPX4 Rated for water resistant operation.
 2 meter impact resistance tested
 Removable pocket clip.

APPROVALS*: Stylus Reach® (specific models)


 Class I, Division 1, Groups A, B, C, D, T3C Exia

 II 2G Ex ia IIB T2 Gb - FTZU 11 ATEX 0057X
Ex ia IIB T2 Gb - IECEx FTZU 15.0026X

 Most models meet applicable European Community Directives.

WARRANTY: Streamlight’s Limited Lifetime Warranty

OPTIONAL ACCESSORIES: Lanyard

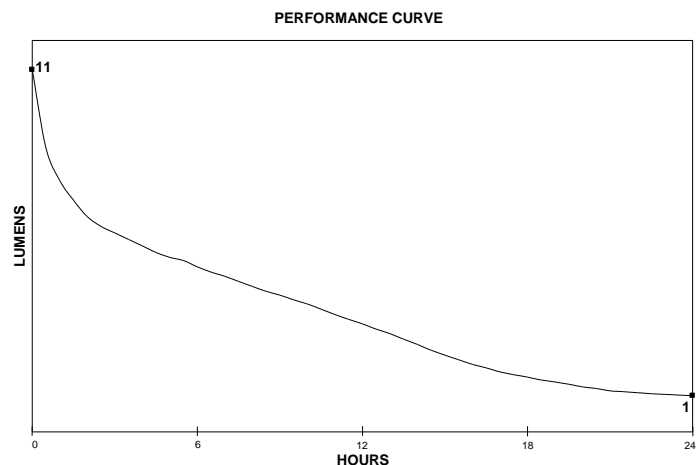

* See product for specific ratings.
 All performance claims to ANSI/NEMA FL1-2009 Standard
 Issued: 10/01/2004
 Revised: 11/23/2015 Rev: 5