

STRION® LED/ STRION® LED HP HIGH PERFORMANCE RECHARGEABLE FLASHLIGHT

MARKET
APPLICATIONS: Premium Professional Light - Law Enforcement, Industrial, Security, Outdoor, Consumer

DESCRIPTION:

Ultra compact & powerful, the Strion® LED and Strion® LED HP rechargeable flashlights offer 3 microprocessor controlled variable intensity modes, strobe mode and the latest in power LED technology. The combination of rechargeable batteries and the C4® LED results in one of the lowest operating costs of any flashlight made.

CASE MATERIAL:

6000 series machined aircraft aluminum with anodized finish. Available in Black.

DIMENSIONS:

Strion® LED: Length: 5.90 in. (14.99 cm) Head Diameter: 1.25 in. (3.18 cm) Barrel Diameter: 0.95 in. (2.41 cm) Diameter at Tri-Lobe Anti-Roll Flange: 1.44 in. (3.66 cm)	Strion® LED HP: Length: 7.00 in (17.78 cm) Major Diameter: 2.20 in. (5.59 cm) Barrel Diameter: 0.95 in. (2.41 cm)
---	---

WEIGHT:

Strion® LED: 5.2 oz (148 grams) with battery	Strion® LED HP: 7.1 oz (202 grams) with battery
---	--

LENS:

Strion® LED: Borofloat High Temperature Glass. Gasket sealed.	Strion® LED HP: Unbreakable polycarbonate lens with scratch-resistant coating. O-ring sealed.
--	--

LIGHT SOURCE:

C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT:

See charts for specific model. Optimized electronics provides regulated intensity.

ON/OFF:

Multi-function, push-button tactical tailswitch. One handed operation of momentary, variable intensity or strobe mode.

RUN TIME:

See charts for specific model. All claims to 10% of initial lumen output. Strobe: 5.5 continuous hours.

BATTERY:

Lithium Ion with on-board safety control circuit, 3.75V, 2000mAh minimum, rechargeable up to 1000 times.

CHARGING:

 Fits existing Strion® chargers.
 Clamp style charge holder with digital control circuit that prevents overcharge.
 Fully recharges battery in 3 hours and charges battery in product.
 Charge base LED indication: LED Steady - Charging; LED Blinking - Charged.

FEATURES:

 C4® LED technology for extreme brightness.
 IPX4 rated design; water resistant operation.
 2 meter impact resistance tested.
 LED Charge-continuity indicator on charger base.
 Compact, snap-in charger mounts in any position.
 Serialized for positive identification.

WARRANTY:


Streamlight's Limited Lifetime Warranty.







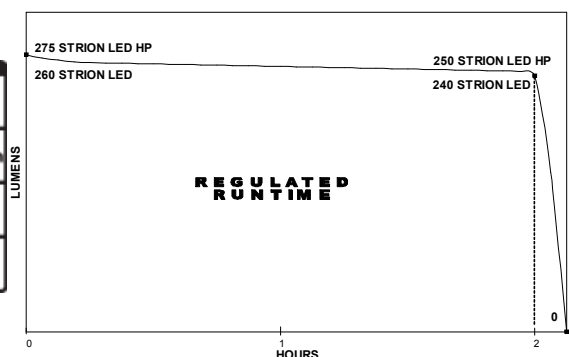

APPROVALS:

 Meets applicable European Community directives. 
OPTIONAL ACCESSORIES:

Strion® LED: Color Filters, Safety Wands, Holster, Rail Mount.	Strion® LED HP: Safety Wands, Holster, Rail Mount.
---	---

PERFORMANCE CURVE



	Strion® LED				Strion® LED HP			
	FL1 STANDARD	HIGH	MEDIUM	LOW	FL1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		260 LUMENS	130 LUMENS	65 LUMENS		275 LUMENS	138 LUMENS	70 LUMENS
RUNTIME		2h	4h	7h 30min		2h	4h	7h 30min
DISTANCE		200m	141m	100m		400m	283m	200m
INTENSITY		10,000cd	5,000cd	2,500cd		40000cd	20000cd	10000cd