

PRODUCT FACT SHEET

ProTac® 2AAA HIGH PERFORMANCE ALKALINE FLASHLIGHT

MARKET

APPLICATIONS: Law Enforcement, Security, Emergency Medical Services, Sporting Goods, Hardware/Tool, Consumer

DESCRIPTION: Compact & powerful, the ProTac® series flashlights offer high and low intensity modes, strobe mode and the

latest in power LED technology. The combination of small size and output from the C4® LED result in one of

the brightest tactical personal carry lights for its' size.

CASE MATERIAL: 6000 series machined aircraft aluminum with anodized finish. Available in Black.

DIMENSIONS: Length: 5.62 in. (14.27 cm)

Head Diameter: 0.72 in. (1.83 cm) Barrel Diameter: 0.05 in. (1.27 cm)

WEIGHT: 2.0 oz (57 grams) with battery

LENS: Glass lens, o-ring sealed.

LIGHT SOURCE: C4[®] LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: High - 80 Lumens, 1550 candela peak beam intensity, and 80 meter beam distance.

Optimized electronics provides regulated intensity.

ON/OFF: Multi-function, push-button tactical tail switch. One handed operation of momentary, variable intensity or

Low - 10 Lumens, 200 candela peak beam intensity, and 28 meter beam distance.

strobe mode.

RUN TIME: See chart for run time data. All run time claims are to 10% of initial lumen output.

BATTERY: Two (2) AAA Alkaline batteries.

FEATURES: C4® LED technology for extreme brightness.

LED Solid State Power Regulation provides maximum light output throughout battery life.

IPX7 rated design; waterproof to 1 meter for 30 minutes.

Anti-roll facecap.

Removable pocket clip and Holster. Serialized for positive identification.

WARRANTY: Streamlight's Limited Lifetime Warranty

APPROVALS: Meets applicable European Community directives. **CE**

OPTIONAL


ACCESSORIES: Holster

OUTPUT


RUNTIME

DISTANCE

INTENSITY



Strobe Runtime: 5 hours

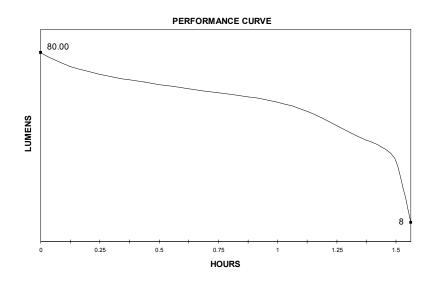

All performance claims tested to ANSI/NEMA FL1-2009 Standard

Issued: 1/11/12

Revised: Rev: Made In China Document #207